



AM-BOSS

ACCESS LADDERS PTY LTD

A.B.N. 23 007 214 959



11-13 MAIDA AVENUE, NORTH SUNSHINE, 3020 AUSTRALIA
 TEL: (03) 9310 8788 • (03) 9366 0899 FAX: (03) 9367 9673
 INTERNATIONAL TEL: +61 3 9310 8788 +61 3 9366 0899 FAX: +61 3 9367 9673
 EMAIL: amboss1@bigpond.com WEBSITE: www.ambossaccessladder.com.au

AM-BOSS Access Ladders are CodeMark Certified

GUIDE TO INSTALLATION

FOR TYPES: SUSPENDED CEILING/S

In a tiled, 1200x600mm ceiling, up to 3000mm in height, it is preferred to install this access ladder to take the place of one tile, however the hinge or opening end of the hatch will intrude into the next tile by 60mm approx., which is not noticeable in the overall view of the ceiling.

A support frame for the pull-down access ladder is **necessary** to support access ladder and person. This support frame must be securely fixed and braced 40mm above the suspended ceiling to a **solid structure above**. A Suspended Ceiling Kit can be purchased from AM-BOSS Access Ladders Pty Ltd. If using an AM-BOSS Suspended Ceiling Kit, predrilled holes in the support frame and the AM-BOSS access ladder frame will match. If other support frame is used, to maintain the integrity of the pull-down access ladder (all Models), **ALL** the predrilled fixing holes in the AM-BOSS access ladder frame **WILL HAVE TO BE USED**. Once the support frame has been firmly secured and braced installation of the AM-BOSS pull-down access ladder can proceed.

Prior to installation, fit eyebolt to panel. With two people, push the fully assembled unit into the opening of the support frame. Fix the AM-BOSS access ladder to the support frame using two (2) of the eight, in total (8) pre-drilled holes on either side of each **end** of the access hatch, then open the hatch and do the last four (4) either side near the position of the counter balancing system in the middle of the unit. Unfold the access ladder, **DO NOT WALK ON THE LADDER AT THIS TIME**. Now adjust the ladder, (two screws with lock nuts – refer Adjustment sticker inside frame), so that feet are on the floor and hinges are closed ie butted against each other, **finished**.

Ceiling cut out sizes:


IMPORTANT NOTE: CUT-OUT NOT TO BE WIDER AS SHOWN

'Access-Boss™,	Commercial Series up to 3000mm:	1220mm x 570mm
'Access-Boss™,	Commercial Series 3000mm to 3995mm:	1520mm x 570mm
	Ceiling Heights from 4000mm – Cutout to be advised.	
'Big-Boss™,	Commercial Series up to 3000mm:	1220mm x 770mm
'Big-Boss™,	Commercial Series 3000mm to 3995mm:	1520mm x 770mm
	Ceiling Heights from 4000mm – Cutout to be advised.	
'AM-BOSS Inferno-Boss™,	Commercial Series up to 3000mm:	1290mm x 645mm

Note: Clear inside dimensions for the 'Inferno-Boss' are 1165mm x 455mm

'AM-BOSS Inferno-Boss™' an AM-BOSS manufactured support frame is recommended.

SUPPORT FRAME TO BE SUPPORTED FROM SOLID STRUCTURE ABOVE

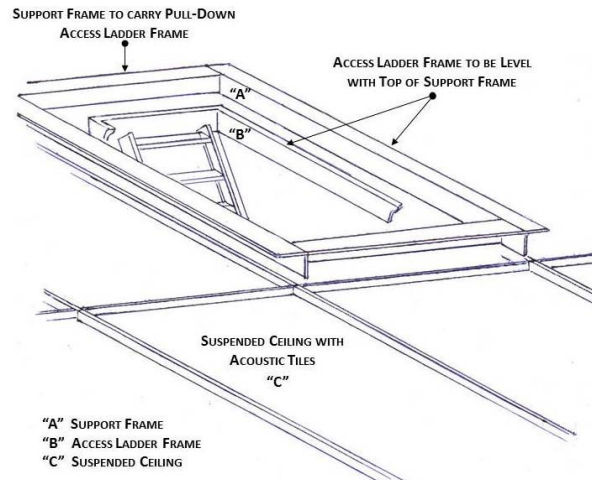

MANUFACTURERS OF CEILING LADDERS FOR DOMESTIC COMMERCIAL AND INDUSTRIAL APPLICATIONS

- Many Stock Sizes On Hand • Special Size Hatches Made To Order • Ladders Made To Any Ceiling Height • Escape Stairs • Electric Stairs •
- Many Options & Accessories • Easily Installed By One Person • Professional Installation Available Including In Suspended Ceilings •